

ixsteel ba10x

The BA10X model is a single-column towel warmer created with 10 mm diam. brushed STAINLESS STEEL elements.

VERSIONS AVAILABLE

- WATER
- ELECTRIC
- MIXED

SUPPORTS

The towel warmers are supplied with standard supports (code ST) that include wall fixing shelves with anchors and wall fixing kit. On request they can be ordered with bracket supports that are permanently welded on the towel warmers and therefore must be specified when placing the order, their code and cost are as follows:



- Right side WALL bracket supports (code MD) €
- Left side WALL bracket supports (code MS) €
- CEILING bracket supports (code SO) €

LIMITS

- WALL bracket supports 60,0 cm max. width
- CEILING bracket supports 60,0 cm max. width

PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.

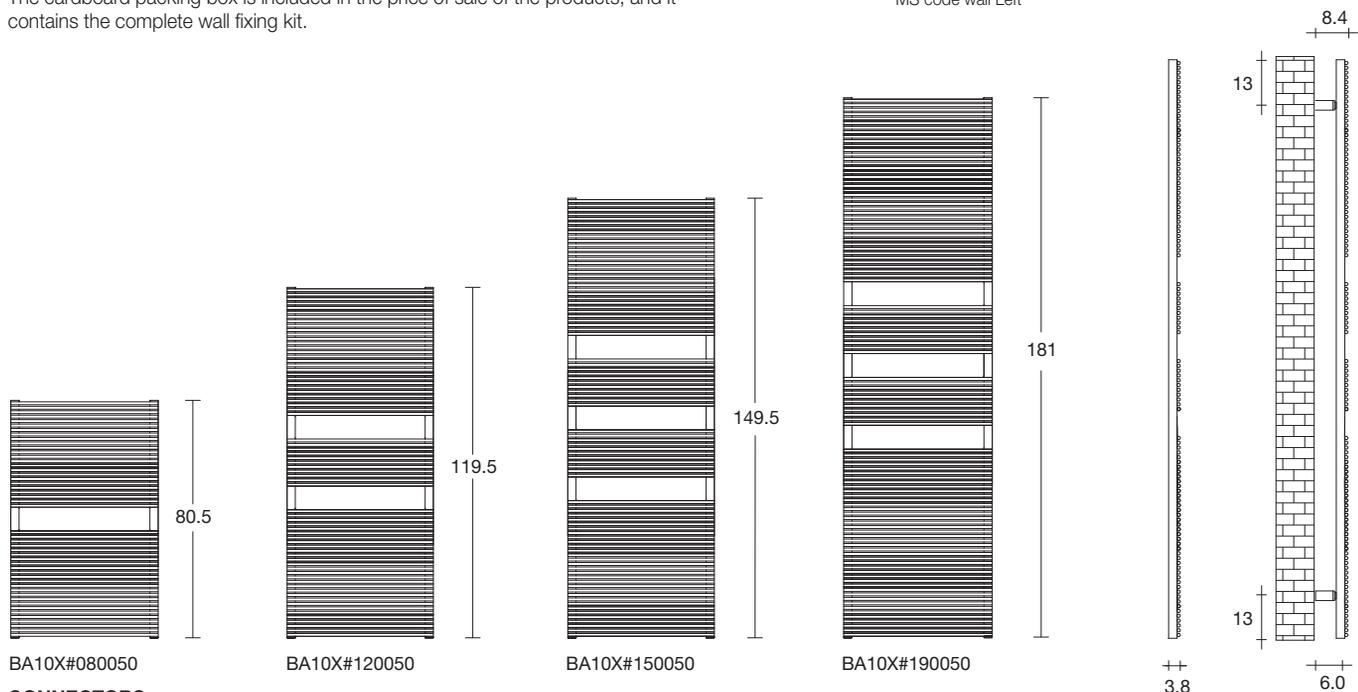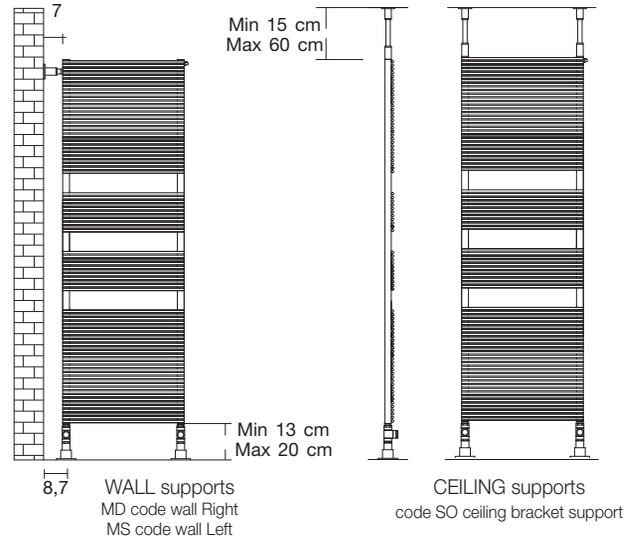

CONNECTORS

The Ixsteel BA10X range of towel warmers are supplied with "0B1" 3/8" diameter connectors

Should different connectors be required, such connections must be strictly specified in the order. IMPORTANT: the connectors of towel warmers and radiators connected to the same system should all be the same, because different connectors could cause operating problems. N.B.: all the connectors of the Ixsteel model are 3/8" in diameter except for the single pipe) connectors which instead are supplied with 1/2" connectors

Standard connectors



standard connector always supplied, if not otherwise specified in the order

Custom-made connectors

Connectors available on request WITH additional charge of €


Custom-made connectors

Connectors available on request WITH additional charge of €

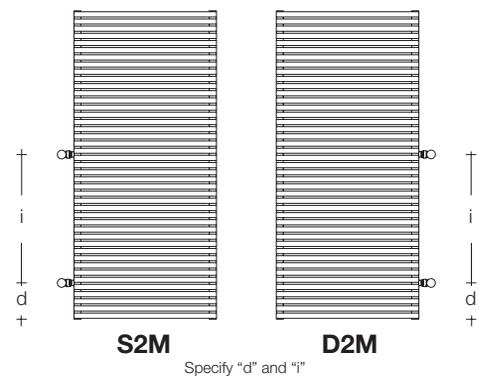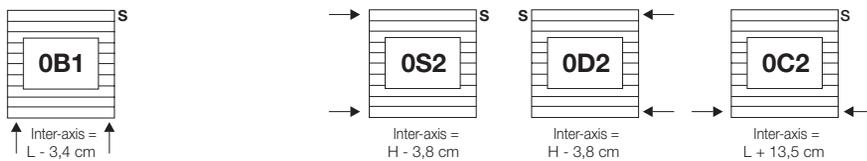

Connectors on request

Connectors available on request WITHOUT any additional charge

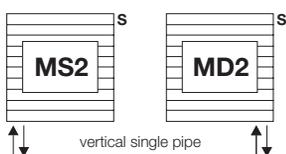

→ = Position of connectors S = Air Vent I = Inter-axis between connectors

To help you properly fill out the code relative to the item requested see code examples on page 5

HYDRAULIC VERSION

Code	H (cm)	L (cm)	Inter-axis (cm)	Watts ΔT 50°C	KCal/h ΔT 50°C	Price (€)	Water Content (l)
BA10X#080040	80,5	40	36,6	297	255		1,507
BA10X#080050		50	46,6	398	342		1,884
BA10X#080060		60	56,6	500	430		2,261
BA10X#120040	119,5	40	36,6	434	373		2,166
BA10X#120050		50	46,6	552	475		2,708
BA10X#120060		60	56,6	670	576		3,249
BA10X#150040	149,5	40	36,6	546	470		2,638
BA10X#150050		50	46,6	678	583		3,298
BA10X#150060		60	56,6	811	697		3,957
BA10X#180040	181,0	40	36,6	665	572		3,297
BA10X#180050		50	46,6	829	713		4,121
BA10X#180060		60	56,6	993	854		4,946

For correction factors different to ΔT 50°C see page 206

Towel warmers available in stock with OB1 connector and in White RAL 9010 colour

ixsteel ba10xe electric and dual version

ELECTRIC VERSION

The standard electric version is supplied with a Class 2 resistor installed on the right side of the towel warmer. The resistor is equipped with safety thermal cut-out and preset temperature control.

MIXED VERSION (ELECTRIC/WATER)

The mixed version is created with the application of a specific conversion kit that enables the towel warmer to operate both with the heating system's hot water and electrically.

For both versions some variants for room temperature control are available as accessories, specifically:

- Resistor with room thermostat installed in the resistor as shown in the diagram in page i 123.
- Room temperature control with DIGITAL wireless THERMOSTAT programmable with 4 different programs
- Room temperature control with wireless WALL THERMOSTAT featuring temperature adjustment and on/off button.

ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)


There is no additional colour or finish charge because the Ixsteel model only comes in brushed stainless steel.

SUPPORTS


The towel warmers are supplied with standard supports (code ST) which include wall fixing shelves. The bracket supports are NOT possible in the electric version.

PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.


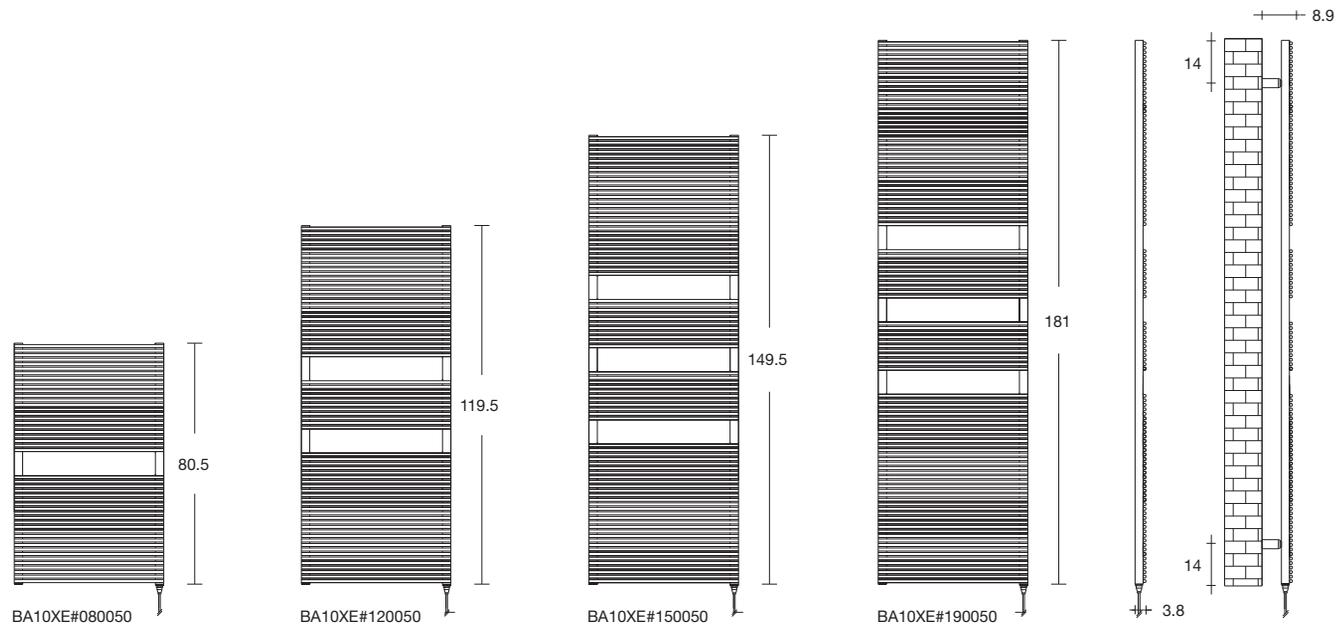


WIRELESS THERMOSTAT CONNECTION DIAGRAM

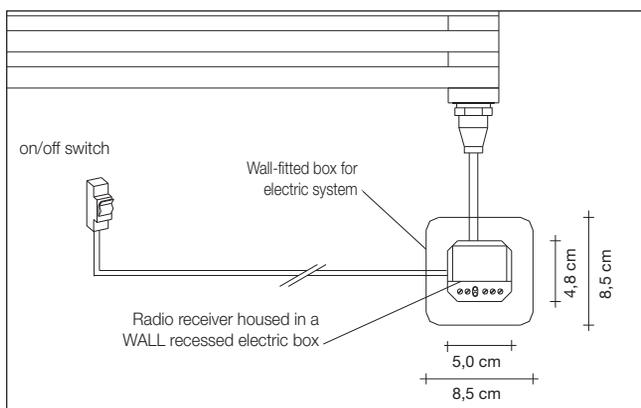

WIRELESS THERMOSTATS

Both these control and temperature customizing solutions require the installation of a radio receiver housed in a specific electrical box, which is to be recessed in the wall.

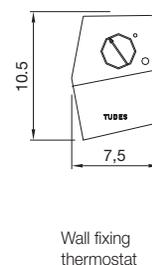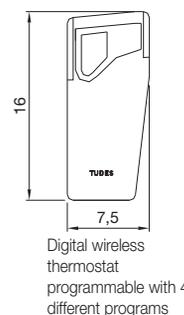

To help you properly fill out the code relative to the item requested see code examples on page 5

ELECTRIC VERSION

Code	H* (cm)	L (cm)	Electric resistor	Resistor type	Price (€)
BA10XE#080040	80,5	40,0	300	Class 2	
BA10XE#080050		50,0	300	Class 2	
BA10XE#080060		60,0	600	Class 2	
BA10XE#120040	119,5	40,0	600	Class 2	
BA10XE#120050		50,0	600	Class 2	
BA10XE#120060		60,0	900	Class 2	
BA10XE#150040	149,5	40,0	600	Class 2	
BA10XE#150050		50,0	900	Class 2	
BA10XE#150060		60,0	900	Class 2	
BA10XE#180040	181,0	40,0	900	Class 2	
BA10XE#180050		50,0	900	Class 2	
BA10XE#180060		60,0	1200	Class 2	

* The height indicated DOES NOT include the space taken up by the electrical resistor that protrudes 5cm downwards.

DUAL VERSION

Code	H* (cm)	L (cm)	Electric resistor	Resistor type	Price (€)
BA10XM#080040	80,5	40,0	300	Class 2	
BA10XM#080050		50,0	300	Class 2	
BA10XM#080060		60,0	600	Class 2	
BA10XM#120040	119,5	40,0	600	Class 2	
BA10XM#120050		50,0	600	Class 2	
BA10XM#120060		60,0	900	Class 2	
BA10XM#150040	149,5	40,0	600	Class 2	
BA10XM#150050		50,0	900	Class 2	
BA10XM#150060		60,0	900	Class 2	
BA10XM#180040	181,0	40,0	900	Class 2	
BA10XM#180050		50,0	900	Class 2	
BA10XM#180060		60,0	1200	Class 2	


* The height DOES NOT include the space taken up by the KIT for the MIXED version that protrudes 11,5 cm downwards.
Mixed version inter-axis: L-10,6 cm. The inter-axis in the MIXED version is not centred in respect to the towel warmer (see diagram)

ACCESSORIES (for electric and mixed version)


Code	Description	Finishes	Price (€)
ZRF001	Wall-fitted booster function radio frequency emitter box (EMG TH IMH)-MCT8595		
ZRF002	Weekly programming unit via radio frequency (table version)		
ZRF003	Radiofrequency receiver for wall box (REA 1CIMH A) - MCT8600		
ZRES#S9	WHITE room thermostat for Class 2 resistors	white	
ZRES#S8	GREY room thermostat for Class 2 resistors	grey	

ELECTRIC VERSION DIAGRAM

CLASS 2 RESISTOR always supplied on electric version

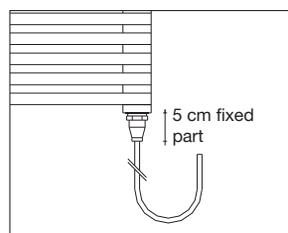


ROOM THERMOSTAT with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

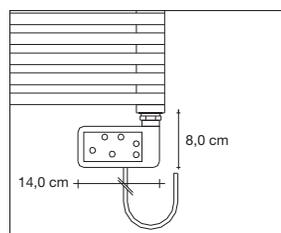

MIXED VERSION DIAGRAM

Kit for Class 2 ELECTRIC RESISTOR, always supplied in MIXED version

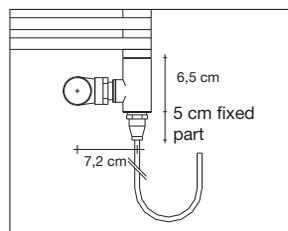

Kit for ROOM THERMOSTAT kit with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

