

# bath 25

## ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of RAL 9010 for the coloured versions and on the base price of Glossy Chrome for the plated finishes.

C0 Category	without any additional charge (RAL 9010)
C1 Category	+10%
C2 Category	+15%
C3 Category	+20%
RAL colours not included in the colour chart	+30%
Colours according to samples	request feasibility and cost estimate
PLATED finishes	See page 90

## SUPPORTS

The towel warmers are supplied with standard supports (code ST) that include wall fixing shelves with anchors and wall fixing kit. On request they can be ordered with bracket supports that are permanently welded on the towel warmers and therefore must be specified when placing the order, their code and cost are as follows:



Right side WALL bracket supports	(code MD) €
Left side WALL bracket supports	(code MS) €
CEILING bracket supports	(code SO) €

## LIMITS

WALL bracket supports	60,0 cm max. width
CEILING bracket supports	80,0 cm max. width

## PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.

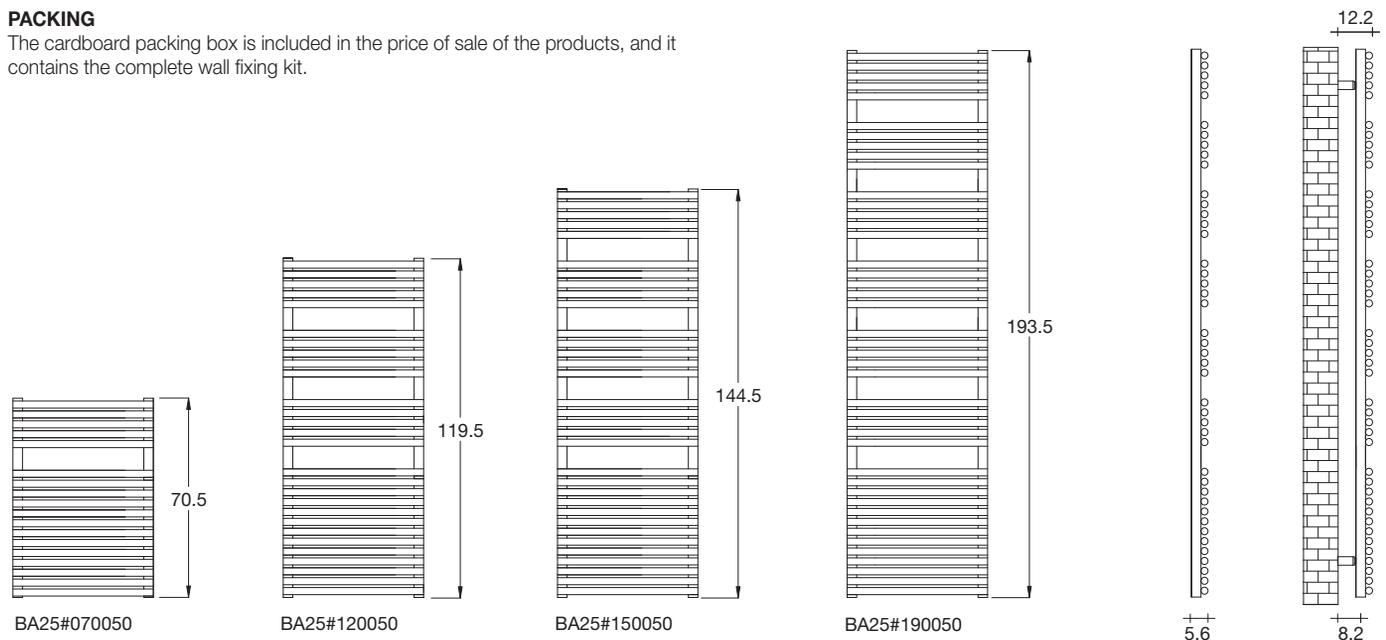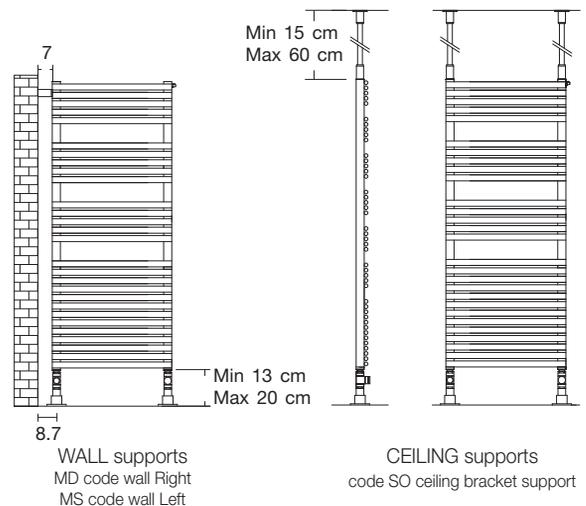

## CONNECTORS

The BATH 25 range of towel warmers are supplied with "0B1" connectors".

Should different connectors be required, such connections must be strictly specified in the order. IMPORTANT: the connectors of towel warmers and radiators connected to the same system should all be the same, because different connectors could cause operating problems.

### Standard connectors



standard connector always supplied, if not otherwise specified in the order

### Custom-made connectors

Connectors available on request WITH additional charge of €  
For C05 connectors additional charge of €


### Custom-made connectors

Connectors available on request WITH additional charge of €

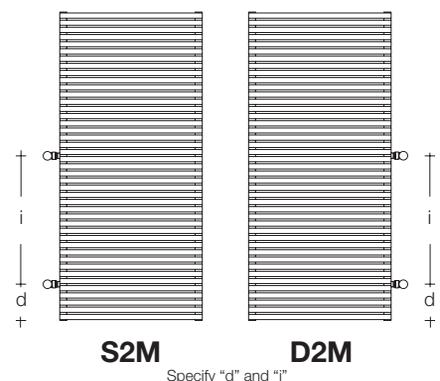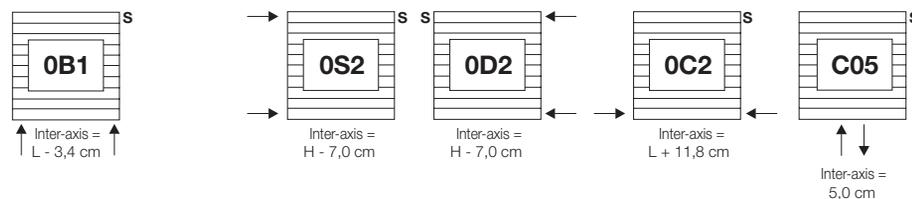

### Connectors on request

Connectors available on request WITHOUT any additional charge

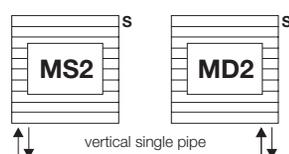

→ = Position of connectors    S = Air Vent    I = Inter-axis between connectors



To help you properly fill out the code relative to the item requested see code examples on page 5

#### HYDRAULIC VERSION

Code	H (cm)	L (cm)	Inter-axis (cm)	Watts ΔT 50°C Coloured version	Category C0 RAL 9010 (€)	Category C1 (€)	Category C3 (€)	Water Content (l)
BA25#070040	70,5	40	36,6	352				3,933
BA25#070050		50	46,6	441				4,648
BA25#070060		60	56,6	529				5,363
BA25#070070		70	66,6	617				6,079
BA25#070080		80	76,6	705				6,794
BA25#070090		90	86,6	793				7,510
BA25#070100		100	96,6	881				8,225
BA25#120040	119,5	40	36,6	536				6,261
BA25#120050		50	46,6	670				7,374
BA25#120060		60	56,6	803				8,487
BA25#120070		70	66,6	937				9,600
BA25#120080		80	76,6	1071				10,712
BA25#120090		90	86,6	1205				11,825
BA25#120100		100	96,6	1339				12,938
BA25#150040	144,5	40	36,6	614				7,426
BA25#150050		50	46,6	768				8,737
BA25#150060		60	56,6	922				10,049
BA25#150070		70	66,6	1075				11,361
BA25#150080		80	76,6	1229				12,672
BA25#150090		90	86,6	1382				13,984
BA25#150100		100	96,6	1536				15,295
BA25#190040	193,5	40	36,6	792				9,755
BA25#190050		50	46,6	990				11,646
BA25#190060		60	56,6	1188				13,173
BA25#190070		70	66,6	1386				14,882
BA25#190080		80	76,6	1584				16,590
BA25#190090		90	86,6	1782				18,299
BA25#190100		100	96,6	1980				20,008

For correction factors different to ΔT 50°C see page 208

# bath 25 electric and dual version

## ELECTRIC VERSION

The standard electric version is supplied with a Class 2 resistor installed on the right side of the towel warmer. The resistor is equipped with safety thermal cut-out and preset temperature control.

## MIXED VERSION (ELECTRIC/WATER)

The mixed version is created with the application of a specific conversion kit that enables the towel warmer to operate both with the heating system's hot water and electrically.

For both versions some variants for room temperature control are available as accessories, specifically:

- Resistor with room thermostat installed in the resistor as shown in the diagram in page i 87.
- Room temperature control with DIGITAL wireless THERMOSTAT programmable with 4 different programs
- Room temperature control with wireless WALL THERMOSTAT featuring temperature adjustment and on/off button.

## ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of RAL 9010 for the coloured versions and on the base price of Glossy Chrome for the plated finishes.

C0 Category	without any additional charge (RAL 9010)
C1 Category	+10%
C2 Category	+15%
C3 Category	+20%
RAL colours not included in the colour chart	+30%
Colours according to samples	request feasibility and cost estimate


PLATED finishes See page 92

## SUPPORTS


The towel warmers are supplied with standard supports (code ST) which include wall fixing shelves. The bracket supports are NOT possible in the electric version.

## PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.


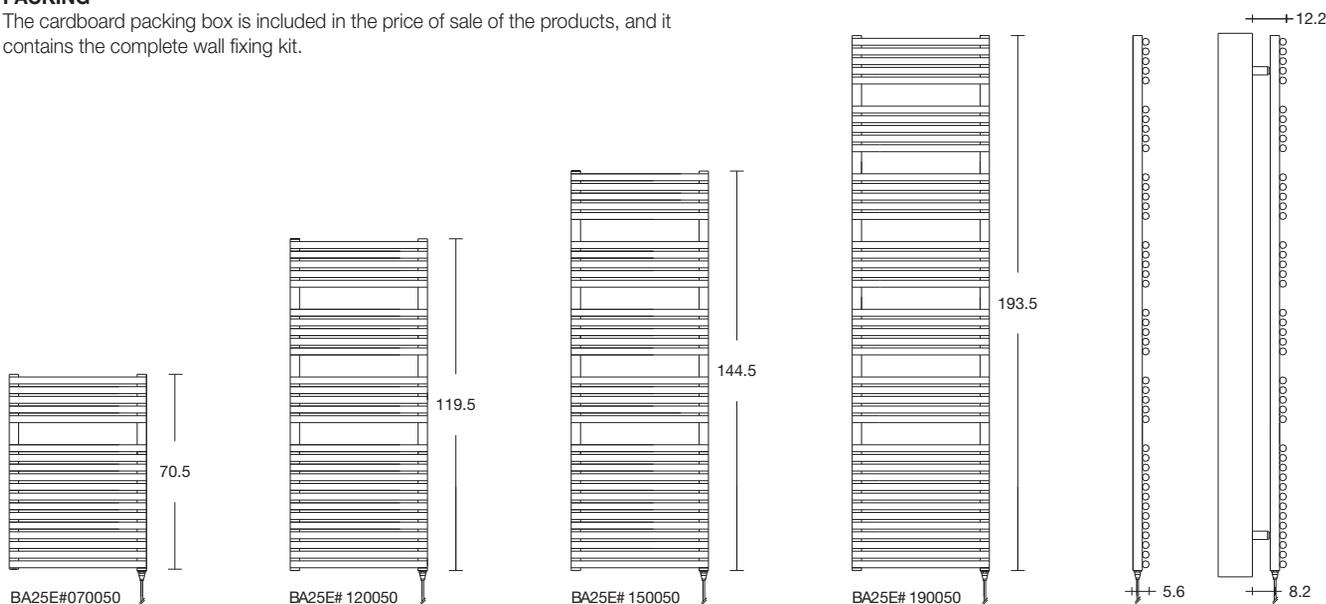


## WIRELESS THERMOSTAT CONNECTION DIAGRAM

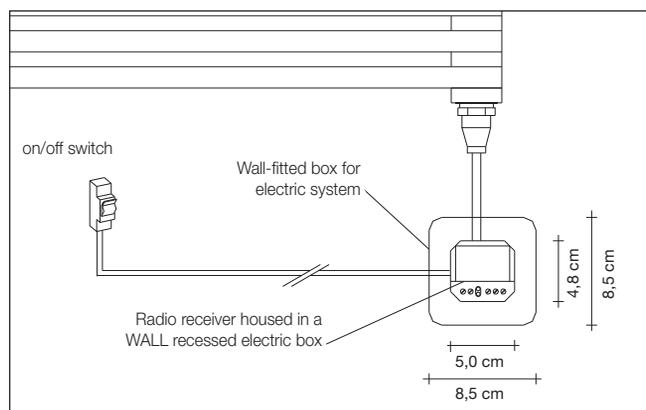

## WIRELESS THERMOSTATS

Both these control and temperature customizing solutions require the installation of a radio receiver housed in a specific electrical box, which is to be recessed in the wall.

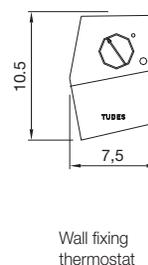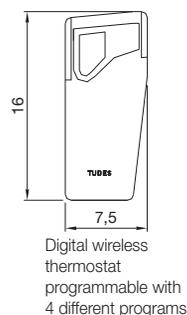

# bath 25 electric and dual version



Watt = Kcal/h ÷ 0,860  
Kcal/h = Watt x 0,860

To help you properly fill out the code relative to the item requested see code examples on page 5

## ELECTRIC VERSION

Code	H* (cm)	L (cm)	Electric resistor	Resistor type	Category C0 RAL 9010 (€)	Category C1 (€)	Category C3 (€)
BA25E#070040	70,5	40	300 W	Class 2			
BA25E#070050		50	300 W	Class 2			
BA25E#070060		60	600 W	Class 2			
BA25E#120040	119,5	40	600 W	Class 2			
BA25E#120050		50	600 W	Class 2			
BA25E#120060		60	900 W	Class 2			
BA25E#150040	144,5	40	600 W	Class 2			
BA25E#150050		50	900 W	Class 2			
BA25E#150060		60	900 W	Class 2			
BA25E#190040	193,5	40	900 W	Class 2			
BA25E#190050		50	900 W	Class 2			
BA25E#190060		60	1200 W	Class 2			

\* The height indicated DOES NOT include the space taken up by the electrical resistor that protrudes 5cm downwards.

## DUAL VERSION

Code	H* (cm)	L (cm)	Electric resistor	Resistor type	Category C0 RAL 9010 (€)	Category C1 (€)	Category C3 (€)
BA25M#070040	70,5	40	300 W	Class 2			
BA25M#070050		50	300 W	Class 2			
BA25M#070060		60	600 W	Class 2			
BA25M#120040	119,5	40	600 W	Class 2			
BA25M#120050		50	600 W	Class 2			
BA25M#120060		60	900 W	Class 2			
BA25M#150040	144,5	40	600 W	Class 2			
BA25M#150050		50	900 W	Class 2			
BA25M#150060		60	900 W	Class 2			
BA25M#190040	193,5	40	900 W	Class 2			
BA25M#190050		50	900 W	Class 2			
BA25M#190060		60	1200 W	Class 2			


\* The height DOES NOT include the space taken up by the KIT for the MIXED version that protrudes 11,5 cm downwards.  
Mixed version inter-axis: L-10,6 cm. The inter-axis in the MIXED version is not centred in respect to the towel warmer (see diagram)

## ACCESSORIES (for electric and mixed version)


Code	Description	Finishes	Price (€)
ZRF001	Wall-fitted booster function radio frequency emitter box (EMG TH IMH)-MCT8595		
ZRF002	Weekly programming unit via radio frequency (table version)		
ZRF003	Radiofrequency receiver for wall box (REA 1CIMH A) - MCT8600		
ZRES#S9	WHITE room thermostat for Class 2 resistors	white	
ZRES#S8	GREY room thermostat for Class 2 resistors	grey	

## ELECTRIC VERSION DIAGRAM

CLASS 2 RESISTOR always supplied on electric version

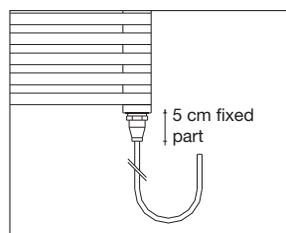


ROOM THERMOSTAT with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

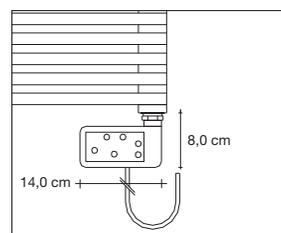


## MIXED VERSION DIAGRAM

Kit for Class 2 ELECTRIC RESISTOR, always supplied in MIXED version

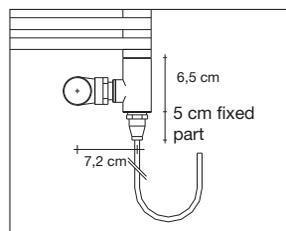

Kit for ROOM THERMOSTAT kit with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

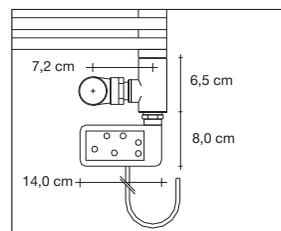

# bath 25 double

## VERSIONS AVAILABLE

- water all the sizes

## ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of RAL 9010 for the coloured versions and on the base price of Glossy Chrome for the plated finishes.

C0 Category	without any additional charge (RAL 9010)
C1 Category	+10%
C2 Category	+15%
C3 Category	+20%
RAL colours not included in the colour chart	+30%
Colours according to samples	request feasibility and cost estimate
PLATED finishes	NOT available

## SUPPORTS

The towel warmers are supplied with standard supports (code ST) that include wall fixing shelves with anchors and wall fixing kit. On request they can be ordered with bracket supports that are permanently welded on the towel warmers and therefore must be specified when placing the order, their code and cost are as follows:



Right side WALL bracket supports	(code MD) €
Left side WALL bracket supports	(code MS) €
CEILING bracket supports	(code SO) €

## LIMITS

WALL bracket supports	40,0 cm max. width
CEILING bracket supports	60,0 cm max. width

## PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.

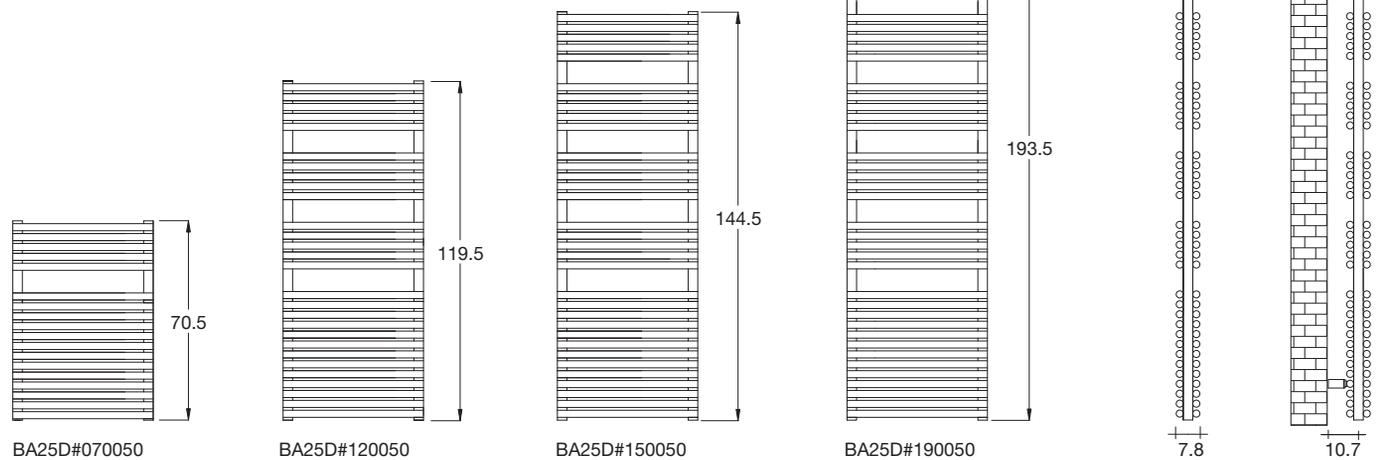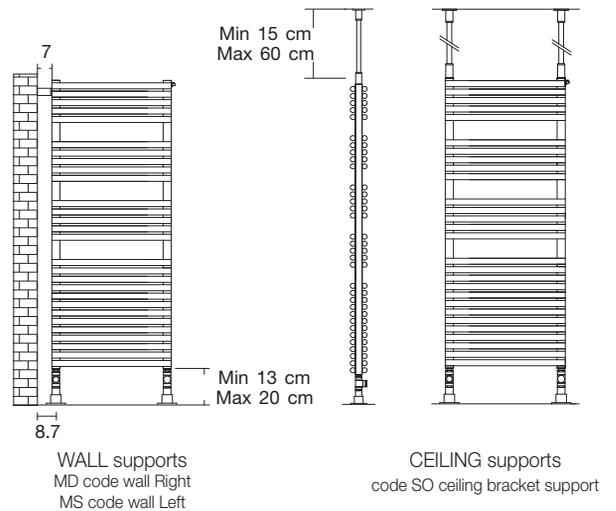

## CONNECTORS

The BATH 25 Double range of towel warmers are supplied with "0B1" connectors.

Should different connectors be required, such connections must be strictly specified in the order. IMPORTANT: the connectors of towel warmers and radiators connected to the same system should all be the same, because different connectors could cause operating problems.

### Standard connectors


standard connector always supplied, if not otherwise specified in the order

### Custom-made connectors

Connectors available on request WITH additional charge of €


### Custom-made connectors

Connectors available on request WITH additional charge of €

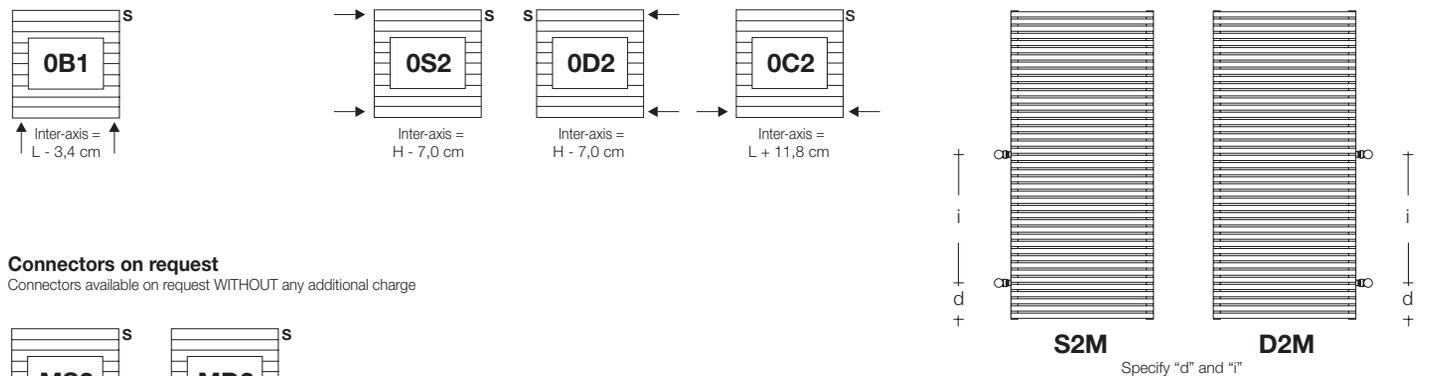

### Connectors on request

Connectors available on request WITHOUT any additional charge

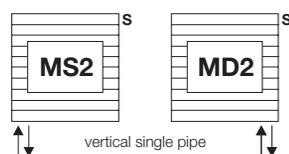

→ = Position of connectors    S = Air Vent    I = Inter-axis between connectors

# bath 25 double

Watt = Kcal/h ÷ 0,860  
Kcal/h = Watt x 0,860

To help you properly fill out the code relative to the item requested see code examples on page 5

## HYDRAULIC VERSION

Code	H (cm)	L (cm)	Inter-axis (cm)	Watts ΔT 50°C Coloured version	Category C0 RAL 9010 (€)	Category C1 (€)	Category C3 (€)	Water Content (l)
BA25D#070040	70,5	40	36,6	552				7,866
BA25D#070050		50	46,6	690				9,296
BA25D#070060		60	56,6	828				10,726
BA25D#070070		70	66,6	966				12,157
BA25D#070080		80	76,6	1104				13,588
BA25D#070090		90	86,6	1242				15,019
BA25D#070100		100	96,6	1380				16,450
BA25D#120040	119,5	40	36,6	832				12,522
BA25D#120050		50	46,6	1039				14,748
BA25D#120060		60	56,6	1247				16,974
BA25D#120070		70	66,6	1455				19,199
BA25D#120080		80	76,6	1662				21,424
BA25D#120090		90	86,6	1870				23,650
BA25D#120100		100	96,6	2078				25,876
BA25D#150040	144,5	40	36,6	962				14,852
BA25D#150050		50	46,6	1203				17,474
BA25D#150060		60	56,6	1443				20,098
BA25D#150070		70	66,6	1684				22,721
BA25D#150080		80	76,6	1925				25,344
BA25D#150090		90	86,6	2165				27,967
BA25D#150100		100	96,6	2405				30,590
BA25D#190040	193,5	40	36,6	1205				19,510
BA25D#190050		50	46,6	1507				23,292
BA25D#190060		60	56,6	1809				26,346
BA25D#190070		70	66,6	2110				29,763
BA25D#190080		80	76,6	2411				33,180
BA25D#190090		90	86,6	2713				36,598
BA25D#190100		100	96,6	3014				40,016

For correction factors different to ΔT 50°C see page 208

# bath 25 chrome-

## ADDITIONAL COLOUR CHARGE

PLATED finishes


G0 Category	without any additional charge (Glossy Chrome)
G1 Category	without any additional charge (Satin-finish Nickel)
G5 Category	+50% (14kt Gold)
G6 Category	+60% (24kt Gold)

## BRACKET SUPPORTS

Not available for the Plated version

## PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.

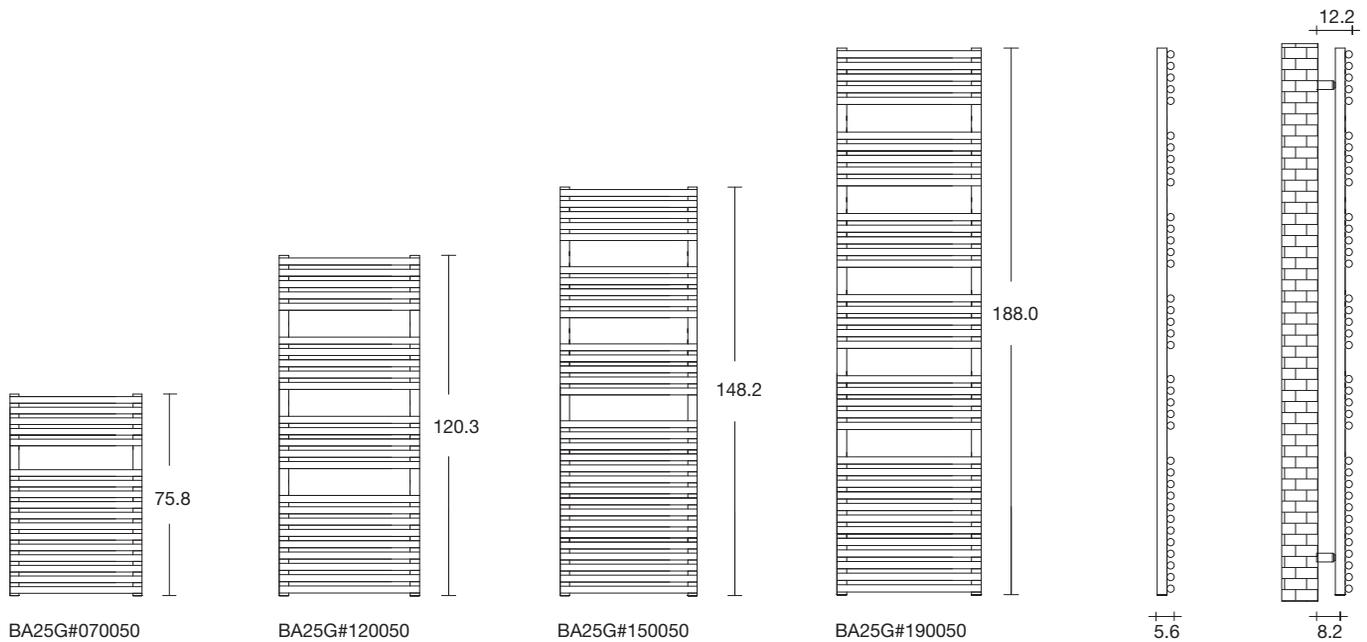


## CONNECTORS

accessories and spare parts

Should different connectors be required, such connections must be strictly specified in the order. **IMPORTANT:** the connectors of towel warmers and radiators connected to the same system should all be the same, because different connectors could cause operating problems.


### Standard connectors

standard connector always supplied, if not otherwise specified in the order



### Connectors on request

Connectors available on request **WITHOUT** any additional charge

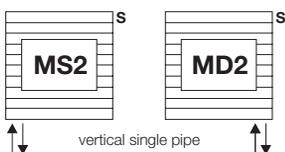

→ = Position of connectors

**S** = Air Vent

**I** = Inter-axis between connectors

# bath 25 chrome-plated



Watt = Kcal/h ÷ 0,860  
Kcal/h = Watt x 0,860

To help you properly fill out the code relative to the item requested see code examples on page 5

## HYDRAULIC VERSION

Code	H (cm)	L (cm)	Inter-axis (cm)	Watts ΔT 50°C Chrome plated version	Chrome plated G0 (€)	Water Content (l)	
BA25G#070040	75,8	40	36,6	239		3,620	
BA25G#070050		50	46,6	299		4,520	
BA25G#070060		60	56,6	359		5,430	
BA25G#120040	120,3	40	36,6	355		5,270	
BA25G#120050		50	46,6	444		6,580	
BA25G#120060		60	56,6	533		7,900	
BA25G#150040	148,2	40	36,6	440		6,720	
BA25G#150050		50	46,6	550		8,400	
BA25G#150060		60	56,6	660		10,000	
BA25G#190040	188,0	40	36,6	551	8,150		
BA25G#190050		50	46,6	689	10,190		
BA25G#190060		60	56,6	827	12,230		

Towel warmers available in stock with OB1 connector

For correction factors different to ΔT 50°C see page 208

# bath 25 chrome-plated electric and dual version

## ELECTRIC VERSION

The standard electric version is supplied with a Class 2 resistor installed on the right side of the towel warmer. The resistor is equipped with safety thermal cut-out and preset temperature control.

## MIXED VERSION (ELECTRIC/WATER)

The mixed version is created with the application of a specific conversion kit that enables the towel warmer to operate both with the heating system's hot water and electrically.

For both versions some variants for room temperature control are available as accessories, specifically:

- Resistor with room thermostat installed in the resistor as shown in the diagram in page i 93.
- Room temperature control with DIGITAL wireless THERMOSTAT programmable with 4 different programs
- Room temperature control with wireless WALL THERMOSTAT featuring temperature adjustment and on/off button.

## ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of Glossy Chrome for the plated finishes.

### PLATED finishes


G0 Category	without any additional charge (Glossy Chrome)
G1 Category	without any additional charge (Satin-finish Nickel)
G5 Category	+50% (14kt Gold)
G6 Category	+60% (24kt Gold)

## SUPPORTS


The towel warmers are supplied with standard supports (code ST) which include wall fixing shelves. The bracket supports are NOT possible in the electric version.

## PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.


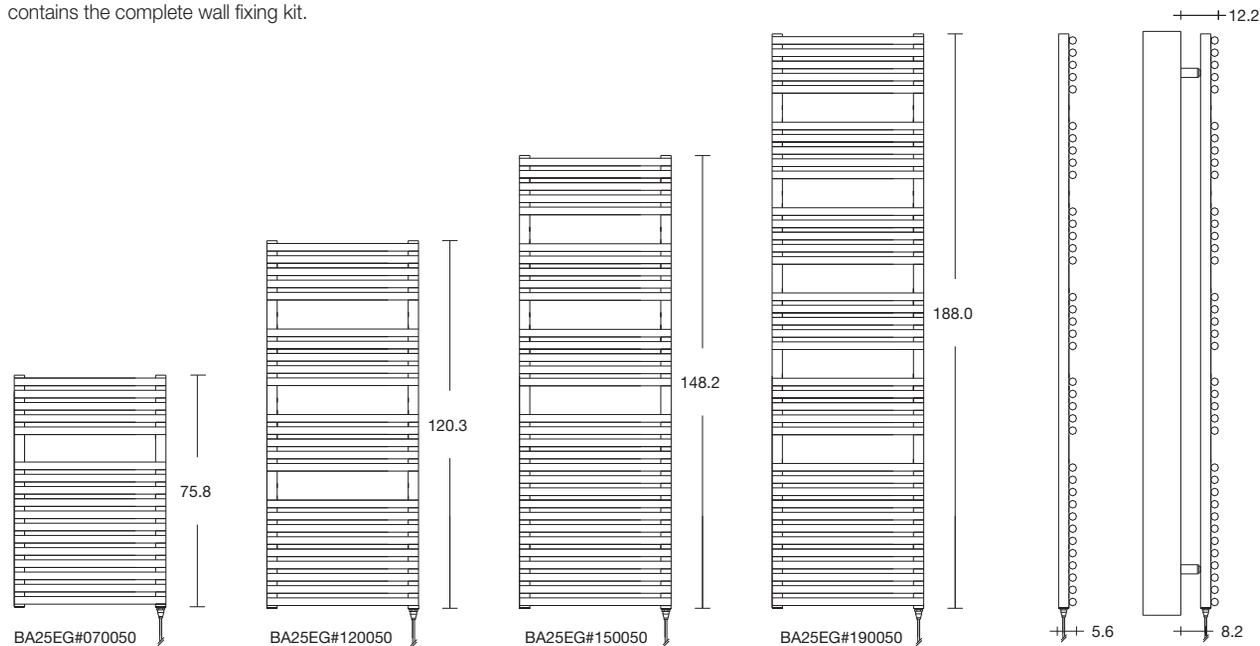


## WIRELESS THERMOSTAT CONNECTION DIAGRAM

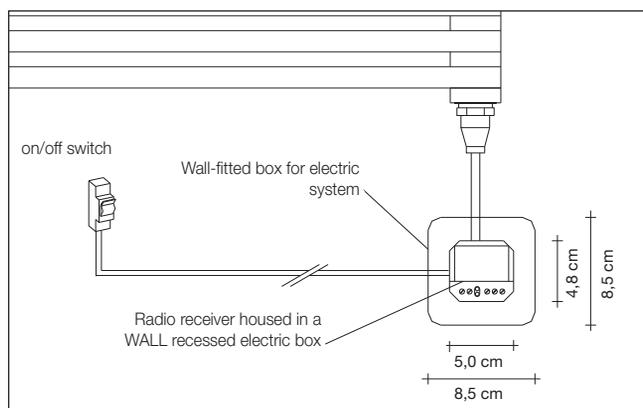

## WIRELESS THERMOSTATS

Both these control and temperature customizing solutions require the installation of a radio receiver housed in a specific electrical box, which is to be recessed in the wall.

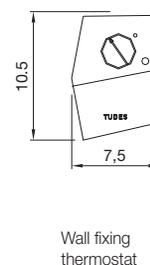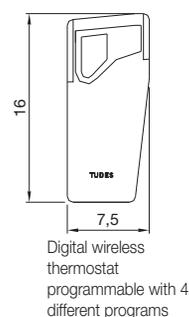

# bath 25 chrome-plated electric and dual version



Watt = Kcal/h ÷ 0,860  
Kcal/h = Watt x 0,860

To help you properly fill out the code relative to the item requested see code examples on page 5

## ELECTRIC VERSION

Code	H* (cm)	L (cm)	Electric resistor	Resistor type	Chrome plated G0 (€)
BA25EG#070040	75,8	40	300 W	Class 2	
BA25EG#070050		50	300 W	Class 2	
BA25EG#070060		60	300 W	Class 2	
BA25EG#120040	120,3	40	600 W	Class 2	
BA25EG#120050		50	600 W	Class 2	
BA25EG#120060		60	600 W	Class 2	
BA25EG#150040	148,2	40	600 W	Class 2	
BA25EG#150050		50	900 W	Class 2	
BA25EG#150060		60	900 W	Class 2	
BA25EG#190040	188,0	40	900 W	Class 2	
BA25EG#190050		50	1200 W	Class 2	
BA25EG#190060		60	1200 W	Class 2	

\* The height indicated DOES NOT include the space taken up by the electrical resistor that protrudes 5cm downwards.

## DUAL VERSION

Code	H* (cm)	L (cm)	Electric resistor	Resistor type	Chrome plated G0 (€)
BA25MG#070040	75,8	40	300 W	Class 2	
BA25MG#070050		50	300 W	Class 2	
BA25MG#070060		60	300 W	Class 2	
BA25MG#120040	120,3	40	600 W	Class 2	
BA25MG#120050		50	600 W	Class 2	
BA25MG#120060		60	600 W	Class 2	
BA25MG#150040	148,2	40	600 W	Class 2	
BA25MG#150050		50	900 W	Class 2	
BA25MG#150060		60	900 W	Class 2	
BA25MG#190040	188,0	40	900 W	Class 2	
BA25MG#190050		50	1200 W	Class 2	
BA25MG#190060		60	1200 W	Class 2	


\* The height DOES NOT include the space taken up by the KIT for the MIXED version that protrudes 11,5 cm downwards.  
Mixed version inter-axis: L-10,6 cm. The inter-axis in the MIXED version is not centred in respect to the towel warmer (see diagram)

## ACCESSORIES (for electric and mixed version)


Code	Description	Finishes	Price (€)
ZRF001	Wall-fitted booster function radio frequency emitter box (EMG TH IMH)-MCT8595		
ZRF002	Weekly programming unit via radio frequency (table version)		
ZRF003	Radiofrequency receiver for wall box (REA 1CIMH A) - MCT8600		
ZRES#S9	WHITE room thermostat for Class 2 resistors	white	
ZRES#S8	GREY room thermostat for Class 2 resistors	grey	

## ELECTRIC VERSION DIAGRAM

CLASS 2 RESISTOR always supplied on electric version

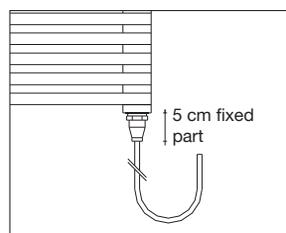


ROOM THERMOSTAT with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

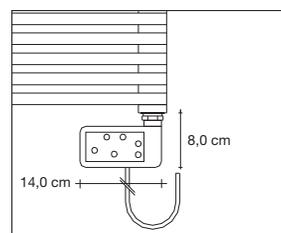

## MIXED VERSION DIAGRAM

Kit for Class 2 ELECTRIC RESISTOR, always supplied in MIXED version

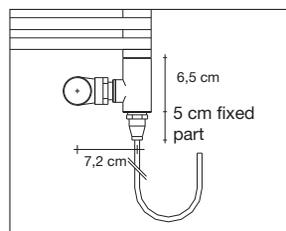

Kit for ROOM THERMOSTAT kit with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

