

Linee evocative si esibiscono in un disegno ritmico. Lo scaldasalviette esprime una potenza ricca di toni e sfumature.

Evocative lines are exhibited in a rhythmic design. The towel heater expresses a power rich in tones and shades.

Des lignes évocatrices s'exhibent en un dessin rythmique. Le chauffe-serviettes exprime une puissance riche en tonalités et nuances.

Líneas evocativas se exhiben en un diseño rítmico. El calentatoallas expresa una potencia rica en tonos y matices.

COD.	A mm	B mm	C mm	white & colors		chrome		Peso kg	Cap. Lt	Resistenze Consigliate Recommended Heating Résistances Conseillées Resistencias Recomendadas			
				$\Delta t=50^{\circ}\text{C}$ W	$\Delta t=30^{\circ}\text{C}$ W	$\Delta t=50^{\circ}\text{C}$ W	$\Delta t=30^{\circ}\text{C}$ W			300w	500w	750w	1000w
770													
HG13 076-045	762	450	420	402	220	282	154	7,4	2,11	●			
32 TUBI	HG13 076-050	762	500	470	439	240	307	8,1	2,24	●			
32 PIPES	HG13 076-060	762	600	570	511	279	358	9,5	2,51	x	●		
32 TUBES	HG13 076-075	762	750	720	619	337	434	11,5	2,91	x	●		
1200													
HG13 119-045	1192	450	420	578	315	405	221	11,2	3,08	x	●		
48 TUBI	HG13 119-050	1192	500	470	629	343	440	12,2	3,27	x	●		
48 PIPES	HG13 119-060	1192	600	570	730	397	512	14,3	3,65		x	●	
48 TUBES	HG13 119-075	1192	750	720	883	480	619	17,3	4,22		x	●	
1500													
HG13 148-045	1482	450	420	693	377	485	264	13,4	3,74		x	●	
57 TUBI	HG13 148-050	1482	500	470	753	410	527	14,7	3,97		x	●	
57 PIPES	HG13 148-060	1482	600	570	874	475	612	17,1	4,41		x	●	
57 TUBES	HG13 148-075	1482	750	720	1056	573	739	20,7	5,08			x	●
1800													
HG13 177-045	1772	450	420	808	439	565	307	15,7	4,40		x	●	
66 TUBI	HG13 177-050	1772	500	470	878	477	615	17,1	4,66		x	●	
66 PIPES	HG13 177-060	1772	600	570	1018	552	713	19,9	5,18			x	●
66 TUBES	HG13 177-075	1772	750	720	1228	664	860	24,1	5,95			x	●


I Kcal/h = 1,16278 W

● white & color
x chrome



Temperatura max di esercizio: 90 °C
Maximum operating temperature: 90 °C
Température maximum de fonctionnement: 90 °C
Temperatura máx de funcionamiento: 90 °C

Pressione max di esercizio: 500 kPa
Maximum operating pressure: 500 kPa
Pression maximum de fonctionnement: 500 kPa
Presión máx de funcionamiento: 500 kPa

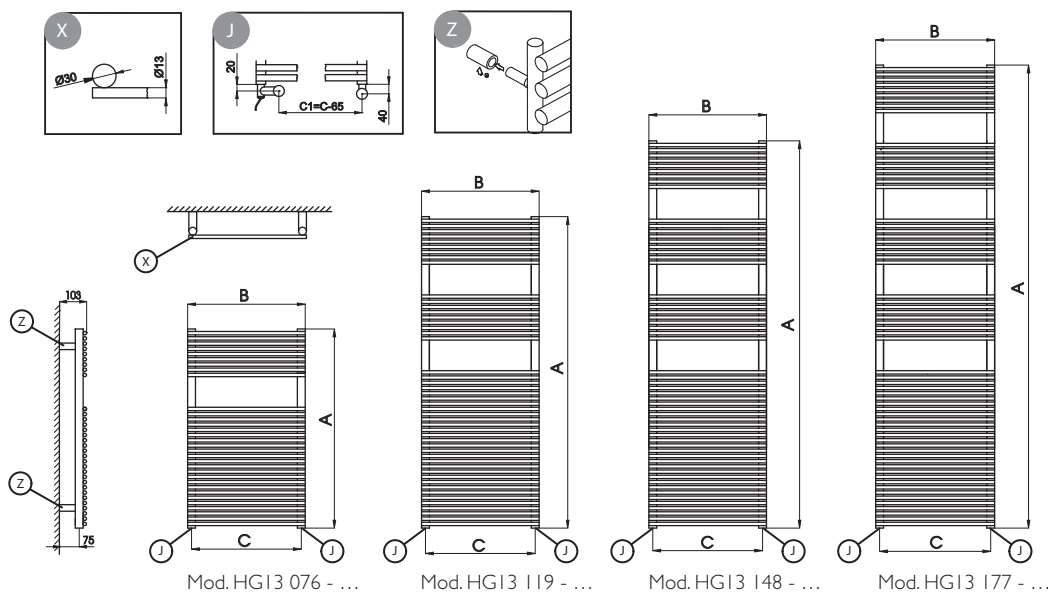

⊗ Dimensioni sezioni corpo scaldante
Radiator body section dimensions
Dimensions des sections du corps chauffant
Dimensiones de las secciones del cuerpo calefactor

① Installazione con resistenza elettrica
Installation with heating element
Installation avec résistance électrique
Instalación con resistencia eléctrica

② Sistemi di fissaggio a parete
Wall fastening systems
Systèmes d'installation murale
Sistemas de fijación a la pared