


# Oddo

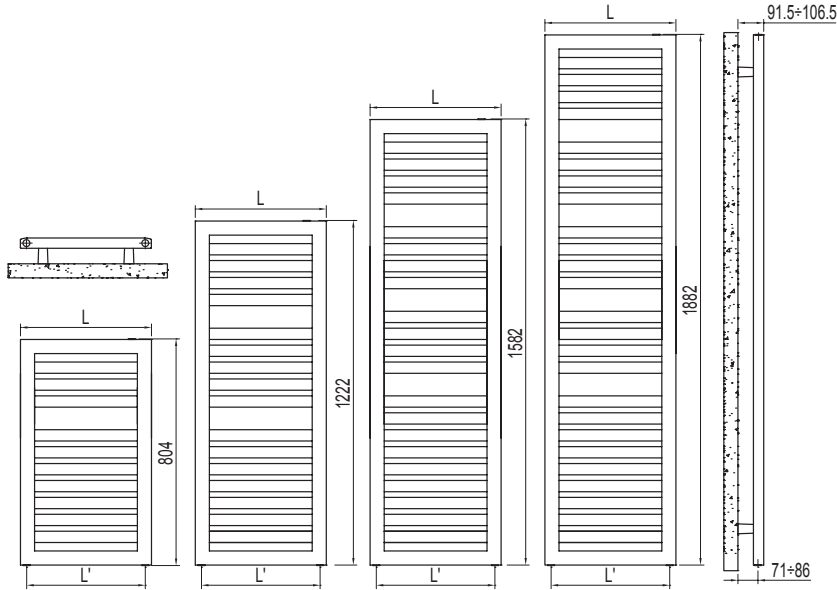

Modello Model Altezza/Height mm	Prof. Depth mm	Largh. Length L mm	Interasse Con. cent. L' mm	Peso Weight Kg	Cap. Cap. lt	Pot. Termica/Thermal power			Esp. Expon. n.	Funz. misto Dual Power Watt
						$\Delta t=50^{\circ}\text{C}$ kcal/h	Watt	$\Delta t=30^{\circ}\text{C}$ (*) Watt		
804 H 804	36,5	450	406	8,9	5,9	294	<b>342</b>	<b>186</b>	1,193	300
	36,5	500	456	9,7	6,4	323	<b>375</b>	<b>204</b>	1,192	400
	36,5	600	556	11,2	7,5	380	<b>442</b>	<b>241</b>	1,190	400
1224 H 1224	36,5	450	406	13,1	8,7	437	<b>508</b>	<b>276</b>	1,193	400
	36,5	500	456	14,2	9,4	479	<b>557</b>	<b>303</b>	1,192	400
	36,5	600	556	16,4	10,9	564	<b>656</b>	<b>357</b>	1,190	700
1584 H 1584	36,5	450	406	16,6	11,0	557	<b>648</b>	<b>350</b>	1,207	700
	36,5	500	456	17,9	11,9	611	<b>710</b>	<b>383</b>	1,207	700
	36,5	600	556	20,7	13,8	718	<b>835</b>	<b>451</b>	1,206	700
1884 H 1884	36,5	450	406	19,4	12,9	655	<b>762</b>	<b>397</b>	1,274	700
	36,5	500	456	21,0	14,0	717	<b>834</b>	<b>437</b>	1,265	700
	36,5	600	556	24,2	16,1	843	<b>980</b>	<b>514</b>	1,265	1000

(\*) Thanks to the high performance of Irsap Oddo radiators, the ideal  $\Delta t$  for low temperature projects is  $\Delta t$  at  $30^{\circ}\text{C}$ .

Heat output are estimated and are undergoing certification. For  $\Delta t$  different from  $50^{\circ}\text{C}$  use the formula:  
 $Q=Q_n (\Delta t / 50)^n$

maximum working pressure allowed: 4 bar  
maximum working temperature allowed:  $95^{\circ}\text{C}$

