

# milano

design Astori De Ponti Associati

“Sensuality and plasticity: these two distinctive traits are the basis of the design concept of the Milano radiator.

Its sinuous and sculptural body synthesises the desire for formal experimentation in the field of interior design heating elements, in the study for free-standing or mural solutions which still have not really been researched much to date.

These features make it an integrating and characterising element of internal design in its most distinctive meaning, offering with its versatility and with its plastic strength a wide range of achievable solutions. From an isolated element of a purely formal connotation to a real instrument defining spaces”.

# milano

## VERSIONS AVAILABLE

- WATER
- ELECTRIC

## ADDITIONAL COLOUR CHARGE

The additional charges are calculated on the base price of RAL 9010.



C0 Category	without any additional charge (RAL 9010)
C1 Category	+15%
C2 Category	+20%
C3 Category	+25%
RAL colours not included in the colour chart	+30%
Colours according to samples	request feasibility and cost estimate

## PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.

## CONNECTORS

The MILANO model is connected to the heating system with the remote connection Valve and Lockshield (GVR) supplied as an ACCESSORY. To fully understand how to arrange for installation consult the technical section.

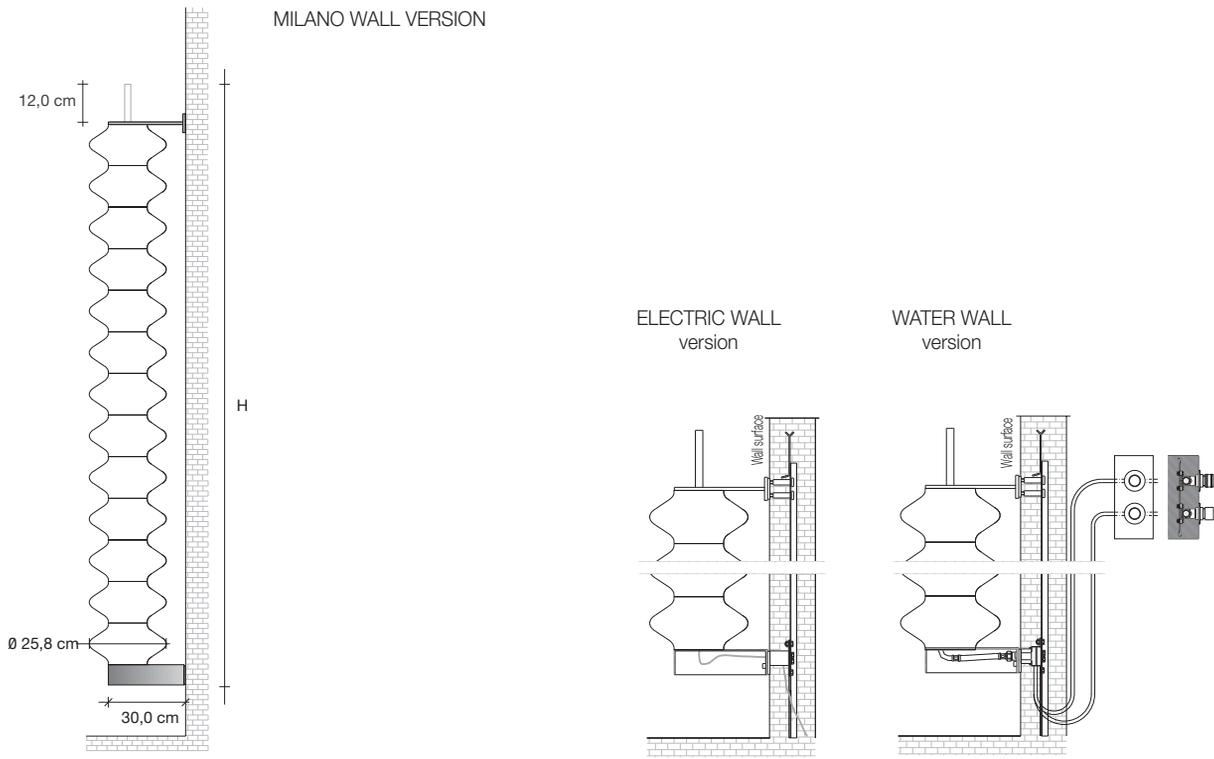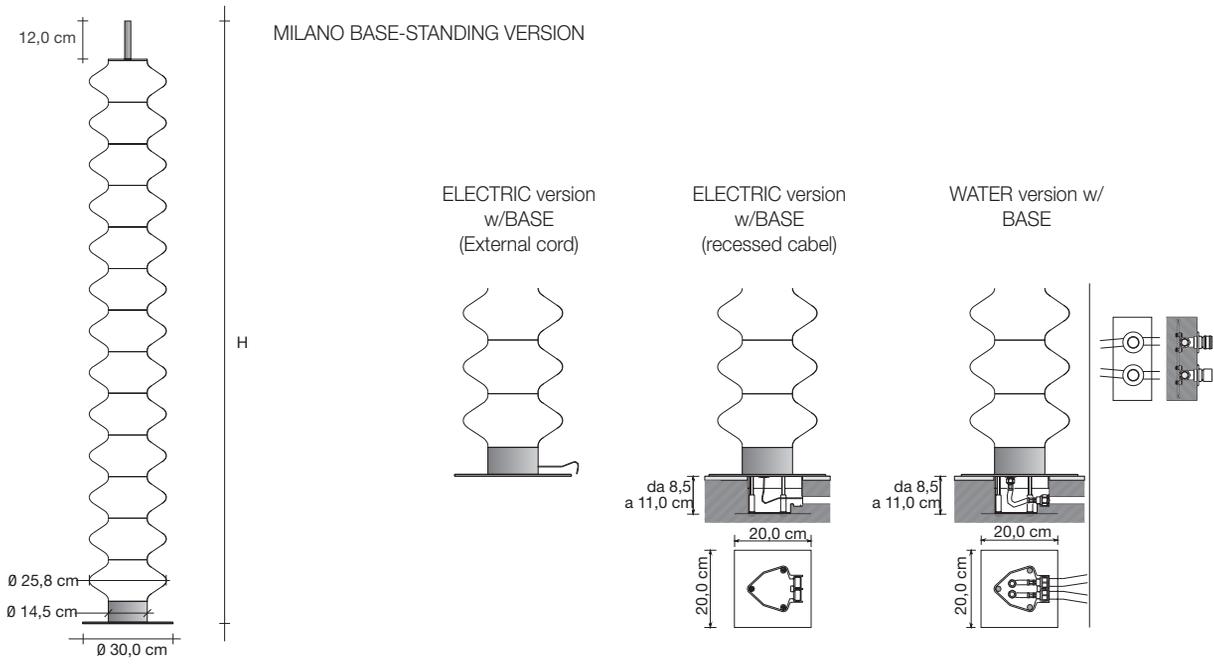

**WATER OPERATING** (the prices do not include arrangement for recessing)

Model	H (cm)	L (cm)	Thermal yield Watts ΔT 50°C	FLOOR VERSION (COD. BAIDR) (€)	WALL VERSION (COD. PAIDR) (€)
MLN#170	171,5	25,8	800		
MLN#200	199,0	25,8	934		
MLN#230	227,0	25,8	1079		

**ELECTRIC OPERATING** (the prices do not include arrangement for recessing)

Model	H (cm)	L (cm)	Thermal yield Watts ΔT 50°C	FLOOR VERSION (COD. BAELI) (€)	WALL VERSION (COD. PAELI) (€)
MLN#170	171,5	25,8	900		
MLN#200	199,0	25,8	900		
MLN#230	227,0	25,8	1200		


**ELECTRIC OPERATING WITH EXTERNAL CORD** (arrangement for recessing is NOT needed for this model)

Model	H (cm)	L (cm)	Thermal yield Watts ΔT 50°C	FLOOR VERSION (COD. BAELE) (€)	
MLN#170	171,5	25,8	900		
MLN#200	199,0	25,8	900		
MLN#230	227,0	25,8	1200		


**recessed part (for Milano wall and floor version)**

Includes the wall recessed part for connection to remote valve assembly (GVR) and the support of the external part of Milano

Model	Description	HYDRAULIC VERSION (COD. IDR) (€)	ELECTRIC VERSION (COD. ELI) (€)
INCMLNBA#	Milano Floor recess		
INCMLNPA#	Milano Wall recess		



Milano Floor recess



Milano Wall recess

**remote connection valve assembly (GVR)**

Includes the complete Valve and Lockshield assembly for remote connection (GVR), can be installed up to a maximum distance of 6 metres from the radiator.

Code	Description	Chrome plated G0 (€)
GVR	RECESSED valve and lockshield assembly for remote connection	