
OFFICINA DELLE IDEE



dedalo

Lines chase each other forming a geometric mark with considerable personality. The LED lighting permeates spaces forming plays of light and shadow.

DEDALO is characterised by its precision-machined steel giving it a defined, unconcealed personality. Continuous geometry to enhance your ambient with refined, sought-after detail.

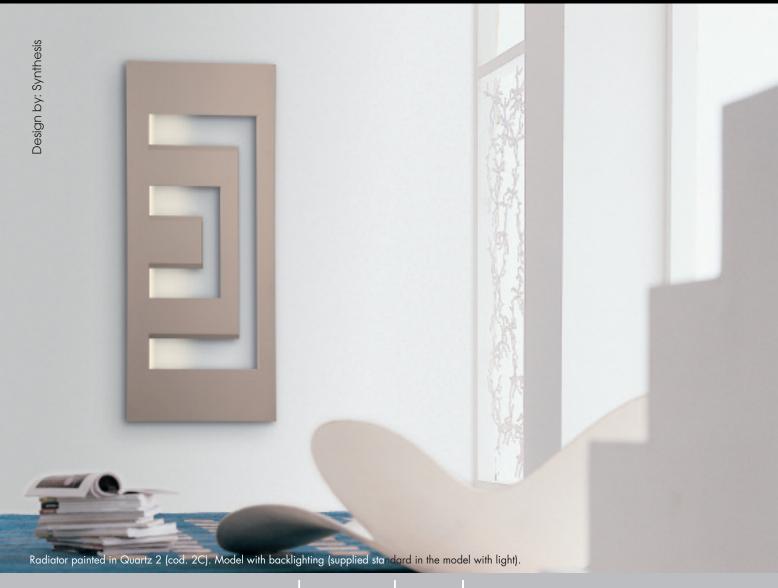


Detail of the radiator Dedalo painted in Quartz 2 (cod. 2C).





EDAI

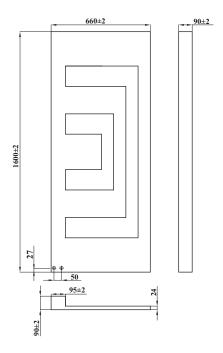

Packaging included:

1 air vent.

1 Water connection system installed on the product complete with fittings for connection to copper pipes (10, 12, 14, and 16 mm diameter) and multilayer pipes (14 x 2 thick and 16 x 2 thick); 1 wall fixing system built into the product column; 1 flush mounted LED lighting system;

In photo: Dedalo radiator. Height mm 1600, width mm 660, painted in Quartz 2 (cod. 2C)

Radiating panel. 1/2" Gas right threading. Maximum working pressure 4 bar. Maximum working temperature 95°C.

TECHNICAL SPECIFICATIONS:

• Dedalo is also available in electric version

• Dedalo is also available in electric version								Thermal Power					
MODELLO	Code	Depth mm	Height mm	Width mm	Conn.centre mm	Weight Kg	Capacity It	∆ t 50°C Btu/h	∆t 50°C Watt	∆ t 40°C Watt	∆ t 30°C Watt	∆t 20°C Watt	Expon. n.
Dedalo	DEDL066B xx	90	1600	660	50	23,2	1,4	550	640	486	340	206	1,238
Dedalo with led•	DEDL066B xx	90	1600	660	50	23,2	1,4	550	640	486	340	206	1,238

- xx = colour option Dedalo is only available in "Serie Special" Colours.
- The "Serie Elegance" Flamed Copper(cod. 3B) and Flamed Brass (cod. 4B) are available with a separate quotation.



Heat output are estimated and are undergoing certification. Power calculated with Δt 50°C.

- For Δt different from 50°C use the formula: Q=Qn (Δt / 50)n.
- * Dedalo function with led option code KITLED01.

Dedalo, with backlighting that copies the profile of the product, represents an ideal combination between artistic design and colour effect.

In photo: Detail of Dedalo radiator.

